

FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 6770-6	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/049322	
INTERNATIONAL APPLICATION NO. PCT/GB00/03125		INTERNATIONAL FILING DATE 14 August 2000		PRIORITY DATE CLAIMED 12 August 1999	
TITLE OF INVENTION Magnetised Transducer Element for Torque or Force Sensor					
APPLICANT(S) FOR DO/EO/US FAST Technology AG					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Items 11 to 20 below concern document(s) or information included:					
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information:					
Published International Application with Search Report (32 pgs.) International Preliminary Examination Report (claims 1-30) (14 pgs.) Two (2) Notifications of Recording of A Change (2 pgs.) Unsigned Declaration and Power of Attorney (2 pgs.)					

FORM P10-1390 (REV 12-2001) page 2 of 2

10049322 10/049322

JC13 Rec'd PCT/PTO 11 FEB 2002

PATENTS #3/a

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of LUTZ AXEL MAY, et al.

Serial No.

Filed:

For: MAGNETISED TRANSDUCER ELEMENT FOR TORQUE OR FORCE SENSOR

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231
Box Non-Fee Amendment

Sir:

Please enter this amendment prior to calculating the filing fee for this case.

IN THE CLAIMS

A marked-up version of the claims is attached as Exhibit A (5 pages) hereto.

A clean version of the claims follows:

1. A transducer element for a torque or force transducer comprising a member having a structure which extends generally radially of an axis to transmit a stress between a radially inner region of the structure and a radially outer region, and at least one region of permanent magnetisation disposed between said inner and outer regions to be responsive to the transmitted stress and emanate a stress-dependent magnetic field.
2. A transducer element as claimed in claim 1 in which there are two magnetised regions, a radially inner region and a radially outer region between which a stress-dependent field is established.

12. (Amended) A transducer element as claimed in claim 1 in which there are two regions of permanent magnetisation, each being circumferentially magnetised and the polarities of circumferential magnetisation of the two regions being opposite.

13. (Amended) A transducer element as claimed in claim 1 in which there is a single region of permanent magnetisation which extends obliquely to said axis.

14. A transducer element as claimed in claim 13 in which said structure is generally disc-like and includes a step portion in which said single region is provided.

15. (Amended) A stress sensing transducer system comprising a transducer element which is as claimed in claim 1 and which is subject to stress generated between said radially inner and outer regions of said structure through said at least one magnetised region to emanate a torque-dependent magnetic field, and a sensor system comprising one or more magnetic field sensors responsive to said stress-dependent magnetic field to provide a signal representing the stress generated between one and the other of said radially inner and outer regions.

16. (Amended) A torque sensing transducer system comprising a transducer element which is as claimed in claim 1 and which has a torque transmission path extending from one to the other of said radially inner and outer regions of said structure through said at least one magnetised region to emanate a torque-dependent magnetic field, and a sensor system comprising one or more magnetic field sensors responsive to said stress-dependent magnetic field to provide a signal representing the stress transmitted between one and the other of said radially inner and outer regions.

17. A transducer as claimed in claim 16 in which said member is adapted as a torque transmitting part capable of transmitting a rotational drive applied to said inner region of said structure to a load applied to said outer region thereof or vice versa.

18. (Amended) A transducer as claimed in claim 15 in which said member is disc-shaped.

19. (Amended) A transducer system as claimed in claim 15 in which said one or more magnetic field sensors is disposed and oriented to detect a circumferential magnetic field component and provide a signal representing same.

20. A transducer system as claimed in claim 19 further comprising a magnetic field sensor device disposed and oriented to detect a radial magnetic field component and provide a signal representing same.

21. A transducer system as claimed in claim 20 further comprising signal processing circuitry responsive to said signals representing the circumferential magnetic component and the radial magnetic field respectively to derive an output signal representing the circumferential magnetic component referred to the radial magnetic field.

22. A torque or force transducer element

comprising a member adapted to transmit torque or force applied along, on or about an axis extending through the member to a portion of the member spaced from said axis, or vice versa,

said member having a surface transverse to said axis,

a first, outer, region located between said axis and said portion and extending to said surface;

a second, inner, region located between said axis and said outer region and extending to said surface,

said first and second annular regions, being magnetised with opposite polarity, and cooperating at said surface to generate a magnetic field component which is a function of said torque or force.

23. A transducer element as claimed in claim 22 in which said first and second regions are annular and encircle said axis, or at least one of the annular regions is an interrupted annulus, or said first and second regions are arcuate with respect to said axis.

24. (Amended) A transducer element as claimed in claim 22 in which said first and second regions are both longitudinally magnetised to develop a radial magnetic field component extending therebetween at said surface and a circumferential magnetic field component at said surface that is a function of torque.

25. (Amended) A transducer element as claimed in claim 22 in which said first and second regions are both circumferentially magnetised to develop a radial magnetic field component at said surface as a function of torque.

26. A torque or force transducer assembly comprising

first and second members coaxially disposed,

said first member being of greater diameter than said second member,

a disc-like member extending generally radially of said axis and connecting said first member to said second member for transmitting force from one member to the other, said disc-like member comprising two magnetised annular regions that are at least arcuate or annular or are part annular,

said magnetised regions having a magnetisation such that the regions cooperate to generate a magnetic field component that is a function of a stress established in transmitting a load between said first and second members.

27. A transducer assembly as claimed in claim 26 in which said assembly is adapted to transmit torque from one of said members to the other.

28. (Amended) A transducer assembly as claimed in claim 26 in which said magnetised regions are longitudinally magnetised with opposite polarities or circumferentially magnetised with opposite polarities.

29. A transducer assembly as claimed in claim 26 in which said first and second members are mounted to cause flexing of said disc-like member in response to relative axial displacement of the first and second members.

30. A transducer assembly as claimed in claim 26 in which said first and second members are disposed to cause flexing of said disc-like member in response to a relative displacement of said first and second members away from axial alignment.

Remarks

Please enter this amendment prior to calculating the filing fee.

Respectfully submitted,

Fleit Kain Gibbons Gutman & Bongini, P.L. ,

By

Robert C. Kain, Jr.

Reg. No. 30,648

Suite 100

750 S.E. Third Avenue

Ft. Lauderdale, Florida 33316-1153

(954) 768-9002

MARKED - u P CLAIMS

1. A transducer element for a torque or force transducer comprising a member having a structure which extends generally radially of an axis to transmit a stress between a radially inner region of the structure and a radially outer region, and at least one region of permanent magnetisation disposed between said inner and outer regions to be responsive to the transmitted stress and emanate a stress-dependent magnetic field.

2. A transducer element as claimed in claim ¹_^ in which there are two magnetised regions, a radially inner region and a radially outer region between which a stress-dependent field is established.

3. ^(And)_^ A transducer element as claimed in claim 1 ~~or 2~~ in which the or each region of permanent magnetisation is arcuate with respect to said axis.

4. ^(And)_^ A transducer element as claimed in claim 1 ~~or 2~~ in which the or each region of permanent magnetisation is an interrupted annulus.

5. ^(And)_^ A transducer element as claimed in claim 1 ~~or 2~~ in which the or each region of permanent magnetisation is annular.

6. ^(And)_^ A transducer element as claimed in ~~any preceding~~ ¹_^ claim in which said structure has a generally radially extending surface to which the or each magnetised region extends.

7. ^(And)_^ A transducer element as claimed in ~~any preceding~~ ¹_^ claim in which said member has a generally disc-like structure.

8. ^(And)_^ A transducer element as claimed in ~~any preceding~~ ¹_^ claim in which there are two regions of permanent magnetisation; each being magnetised in an axial direction and the polarities of magnetisation of the two regions being opposite.

9. ^(And)
 A transducer element as claimed in ~~claims 8 and 6 and 7~~ in which said structure has two radially-extending surfaces to which the or each region of permanent magnetisation extends and further comprising means located at one of said two surfaces to close a flux path between the two regions.

10. ^(And)
 A transducer element as claimed in ~~any one of claims 1 to 7~~ in which there are two regions of permanent magnetisation providing radially-spaced magnetic poles ^{of} ~~for~~ opposite polarity at a surface of the member.

11. A transducer element as claimed in claim 9 in which a flux path linking said regions is closed within the material of said member.

12. ^(And)
 A transducer element as claimed in ~~any one of claims 1 to 7~~ in which there are two regions of permanent magnetisation, each being circumferentially magnetised and the polarities of circumferential magnetisation of the two regions being opposite.

13. ^(And)
 A transducer element as claimed in ~~any one of claims 1 to 7~~ in which there is a single region of permanent magnetisation which extends obliquely to said axis.

14. A transducer element as claimed in claim 13 in which said structure is generally disc-like and includes a step portion in which said single region is provided.

15. ^(And)
 A stress sensing transducer system comprising a transducer element which is as claimed in ~~any one of claims 1 to 14~~ and which is subject to stress generated between said radially inner and outer regions of said structure through said at least one magnetised region to emanate a torque-dependent magnetic field, and a sensor system comprising one or more magnetic field sensors responsive to said stress-dependent magnetic field to provide a signal representing the stress generated between one and the other of said radially inner and outer regions.

16. ^(Am d)
A torque sensing transducer system comprising a transducer element which is as claimed in ~~any one of claims 1 to 14~~ and which has a torque transmission path extending from one to the other of said radially inner and outer regions of said structure through said at least one magnetised region to emanate a torque-dependent magnetic field, and a sensor system comprising one or more magnetic field sensors responsive to said stress-dependent magnetic field to provide a signal representing the stress transmitted between one and the other of said radially inner and outer regions.

17. A transducer as claimed in claim 16 in which said member is adapted as a torque transmitting part capable of transmitting a rotational drive applied to said inner region of said structure to a load applied to said outer region thereof or vice versa.

18. ^(Am d)
A transducer as claimed in claim 15, ~~16, or 17~~ in which said member is disc-shaped.

19. ^(Am d)
A transducer system as claimed in ~~any one of claims 15 to 18~~ in which said one or more magnetic field sensors is disposed and oriented to detect a circumferential magnetic field component and provide a signal representing same.

20. A transducer system as claimed in claim 19 further comprising a magnetic field sensor device disposed and oriented to detect a radial magnetic field component and provide a signal representing same.

21. A transducer system as claimed in claim 20 further comprising signal processing circuitry responsive to said signals representing the circumferential magnetic component and the radial magnetic field respectively to derive an output signal representing the circumferential magnetic component referred to the radial magnetic field.

22. A torque or force transducer element

comprising a member adapted to transmit torque or force applied along, on or about an axis extending through the member to a portion of the member spaced from said axis, or vice versa,

said member having a surface transverse to said axis,

a first, outer, region located between said axis and said portion and extending to said surface;

a second, inner, region located between said axis and said outer region and extending to said surface,

said first and second annular regions, being magnetised with opposite polarity, and cooperating at said surface to generate a magnetic field component which is a function of said torque or force.

23. A transducer element as claimed in claim 22 in which said first and second regions are annular and encircle said axis, or at least one of the annular regions is an interrupted annulus, or said first and second regions are arcuate with respect to said axis.

24. ^(Am)
A transducer element as claimed in claim 22 ~~or 23~~ in which said first and second regions are both longitudinally magnetised to develop a radial magnetic field component extending therebetween at said surface and a circumferential magnetic field component at said surface that is a function of torque.

25. ^(Am d)
A transducer element as claimed in claim 22 ~~or 23~~ in which said first and second regions are both circumferentially magnetised to develop a radial magnetic field component at said surface as a function of torque.

26. A torque or force transducer assembly comprising

first and second members coaxially disposed,

said first member being of greater diameter than said second member,

a disc-like member extending generally radially of said axis and connecting said first member to said second member for transmitting force from one member to the other said disc-like member comprising two magnetised annular regions that are at least arcuate or annular or are part annular,

said magnetised regions having a magnetisation such that the regions cooperate to generate a magnetic field component that is a function of a stress established in transmitting a load between said first and second members.

27. A transducer assembly as claimed in claim 26 in which said assembly is adapted to transmit torque from one of said members to the other.

28. ^(And)
A transducer assembly as claimed in claim 26 or 27 in which said magnetised regions are longitudinally magnetised with opposite polarities or circumferentially magnetised with opposite polarities.

29. A transducer assembly as claimed in claim 26 in which said first and second members are mounted to cause flexing of said disc-like member in response to relative axial displacement of the first and second members.

30. A transducer assembly as claimed in claim 26 in which said first and second members are disposed to cause flexing of said dis-like member in response to a relative displacement of said first and second members away from axial alignment.

MAGNETISED TRANSDUCER ELEMENT FOR TORQUE OR FORCE SENSOR

This invention relates to a transducer element suitable for use in a torque or force sensor transducer and to a transducer arrangement incorporating the element.

BACKGROUND TO THE INVENTION

One approach to non-contactless sensing of torque in a shaft rotating about its axis is a torque sensor based on magnetoelasticity. A magnetoelastic transducer element is secured to or integral with the shaft, the torque in which is to be measured, and a torque-dependent magnetic field emanated by the transducer element is detected by a sensing device external to the shaft, but not in contact with the shaft, and responsive to the emanated magnetic field. Examples of sensing devices are a Hall effect device, a saturating coil sensor, or various of other magnetic field sensitive devices known in the art. It will be understood that in practice a sensing device may be an assembly of devices. For example, a plurality of sensing devices may be disposed about the axis of the shaft and interconnected to be additive with respect to the torque-dependent field but to cancel in respect of external fields such as the Earth's magnetic field.

Magnetoelastic transducer elements form a ring or annulus which is circumferentially magnetised. The field forms a closed loop normally contained within the element.

One form of transducer element is a separate ring of magnetoelastic material attached to the shaft such as disclosed in U.S. patents 5,351,555, 5,465,627 and

5,520,059, all to Garshelis and assigned to Magnetoelastic Devices, Inc. In the ring transducer elements, the ring supports a circumferential magnetic field which is confined within the ring, that is no field is detectable externally in the absence of torque. When torque in the shaft is transmitted to the magnetoelastic ring, an external magnetic field is emanated and is detected by a sensor arrangement.

A different approach to providing a circumferentially magnetised magnetoelastic sensor is disclosed in International Patent Application PCT/GB99/00736 (published on 4th November, 1999 under the number WO99/56099) in which the transducer element is an integral portion of the shaft whose torque is to be measured. This avoids problems in securing a separate ring properly to the shaft. An integral transducer element approach is also disclosed in published International Patent Applications WO99/21150 and WO99/21151.

Magnetoelasticity is a phenomenon which, as yet, is apparently still not fully understood and explained. It is, therefore, generally desirable to find other forms of magnetisation that might be employed in transducer elements, particularly suitable for torque sensing.

In an alternative to circumferential magnetisation one or more magnetic transducer elements are provided integrally in a shaft of magnetisable material but using longitudinal magnetisation, that is a magnetisation that lies in an axial direction in contrast to circumferential

magnetisation. The longitudinal magnetisation is applied to an annular region of a shaft or more than one
5 such region.

Longitudinal magnetisation is the subject of our copending International application PCT/GB00/03119 filed concurrently herewith and published under the number WO01/13081.

10 Both circumferential magnetisation and longitudinal magnetisation have been primarily applied to shafts or similar parts where torque is transmitted through the magnetised region in the direction of the shaft axis, e.g. a load transmitting shaft having torque applied at
15 one end and a load at the other end.

There is a need to measure torque in parts in which the load transmission is essentially radial. An example is a disc-like structure mounted on a driven shaft and having drive means at its outer periphery, such as gear
20 teeth. The drive may be in the opposite direction.

One proposal for torque measurement in an automobile transmission is disclosed in U.S. patent 4697460 (Sugiyama et al). An energiser coil/detection coil assembly is non-contactingly placed adjacent a disc in
25 which torque stress occurs. The energising coil is A.C. energised to establish an alternating magnetic flux in a flux path through the disc that is torque sensitive. The detection

coil senses torque-dependent changes in the circulating magnetic flux.

SUMMARY OF THE INVENTION

The present invention enables us to provide a number
5 of solutions to this problem by means of a magnetic transducer element or elements located in a radially extending torque transmission path. To this end the transducer element may be formed in a plate or disc in which at least one major surface of the plate or disc is
10 cooperable with a magnetic field sensor arrangement.

The present invention also includes the concept of measuring the bending force or the shear force in an disc-like or plate-like member subject to a bending or shearing moment.

15 Aspects and features of the present invention for which protection is sought are set out in the accompanying claims.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the present invention may be better
20 understood, embodiments of it will now be described with reference to the accompanying drawings, in which:

Fig. 1 shows a side view of an embodiment of the invention using a disc-like member in which the transducer element is formed;

25 Fig. 2 is a face view of the transducer assembly side of the disc seen in Fig. 1;

Fig. 3 is a vector diagram showing radial and circumferential fields;

Fig. 4 is a modification of the embodiment of Fig. 1;

Fig. 5 is a view of another embodiment of the invention using a disc-like member in which the transducer element is formed;

5 Fig. 6 is a view similar to Fig. 1 showing the use of a single-side magnetising source;

Fig. 7 is a side view of a disc-like torque transmitting structure employing a single magnetised transducer region;

10 Fig. 8 is a modification of the structure of Fig. 7 in which a stepped structure is employed with a single magnetised transducer region in the step portion;

Figs. 9 to 11 show examples of the implementation of the present invention to the measurement of bending and shearing forces; and

15 Fig. 12 shows a circuit diagram of apparatus for performing a pre-magnetisation procedure.

DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

In the embodiments to be described like parts bear like reference numerals.

20 The following description will describe a number of different forms or modes of magnetisation which may be employed in sensing torque or other forces. For consistent and reliable measurement, it is preferred that the structure to be magnetised be first subject to a pre-magnetisation procedure described below with reference to Fig. 12 and possibly also to a post-magnetisation procedure also described below.

Fig. 1 shows a diametric section through a circular disc 10 which is to be subject to torque about an axis A-A. The disc is of magnetisable material, or at least the annular region 22 of it is. Adjacent its periphery the disc is magnetised through its thickness to have two radially spaced regions 12 and 14 of opposite polarity. This can be obtained by rotating the disc 10 between a pair of magnets (permanent or electromagnet) 16 and 18 with opposite poles facing each other through the disc. Thus each region 12 and 14 is an annulus of magnetisation. Together they provide a transducer element or region 22. To some extent the magnetic flux will tend to close in a loop including both regions, not unlike a toroidal flux pattern. This assumes the disc has a relatively high magnetic permeability. However, the loop concept must not be taken too far because the overall annular magnetised region 22 is bounded by low permeability air at each side. Thus flux will emerge from the disc surface into the air medium. The performance of the sensor can be improved by profiling the disc such that the magnetised annular regions are thicker than the regions between them or by closing the flux path on the non-sensor side of the disc as will be further described.

Further, by changing the profile of the annular regions in a circumferential direction, there will be a change in the magnitude of the magnetic field as the disc rotates. This can be used to detect rotational velocity of the disc.

Fig. 2 shows a view of one surface 11 of the disc with the regions 12, 14 shown in hatched line. It will be seen that the magnetic flux exterior to the surface and linking regions 12 and 14 will lie radially. This flux is indicated as M_r in Fig. 3. Consider now a use for the disc in which it is being used to transmit torque from a shaft 20, to which it is secured to rotate therewith about axis A-A, to provide drive at the periphery of the disc, formed as a gear wheel 24 for example. The torque transmitted through the disc will tend to deflect or skew the radial field component M_r shown in Fig. 3 to be slightly offset from the radial direction as indicated by M_r' . M_r' can be resolved into a radial component and orthogonal component M_s acting in a circumferential direction with respect to annular sensing region 122. The magnitude and direction of M_s is dependent on the magnitude and direction of the applied torque. This situation would apply equally to the transmission of drive from the outer periphery of the disc to the central shaft.

Referring again to Fig. 2 the radial field M_r can be detected by a sensor 26 radially oriented, and the M_s component measured by a sensor 128 at right angles to the radial direction. These sensors will be placed in fixed positions with respect to the disc rotating past them in non-contacting fashion.

Depending on the drive arrangement and the distribution of stresses in the disc more pairs of non-contacting sensors 26, 28 may be provided angularly

displaced around the disc. Fig. 2 shows four such pairs of non-contacting sensors.

It will also be apparent that the torque sensor arrangement described can be used to measure torque in the shaft 20 communicated to the disc when the outer periphery is held fixed or say under a braking force, or when torque is applied to the periphery and the shaft 20 is fixed or braked.

The orientation of a pair of diametrically opposite Ms sensors 28a, 28b produce Ms components such that the sensors can be connected to add as far as Ms components are concerned but cancel the effects of an external field such as the Earth's magnetic field. The use of four sensors 28a-d in two orthogonally arranged pairs enables the cancellation of external fields from any direction while adding the Ms components.

The use of multiple radial sensors 26 for the reference components Mr, particularly four sensors in two orthogonally arranged pairs, also enables connection in a manner providing cancellation of any external field. The location of sensors to add wanted field components while cancelling external fields is discussed further in aforementioned concurrently filed PCT application PCT/GB00/03119 published under the number WO01/13081.

The sensor devices for the transducer assembly are to one side of the disc 10. The magnetic efficiency can be enhanced by closing the magnetic path on the other side by

a member providing an annulus of high permeability material to bridge regions 12 and 14.

In the embodiment of Figs. 1 to 3, the disc is
5 directly used as a load transmitting member. A disc or other plate-like member appropriately magnetised may also be used for torque measurement by securing the disc or plate to a load transmitting part or any part subject to a torque in its operation. For example Fig. 4 shows a
10 part 30 which is revolving about an axis A-A so as to create a torque in the part. The part has a surface 32 at which the stresses due to the torque are expressed and a disc 34 of the kind shown in Fig. 2 is affixed to the surface 32. The disc 34 must be securely fixed to the
15 surface, e.g. by screws 36, both radially inwardly and outwardly of the sensor region 22 so that the stresses are accurately reflected in this region.

To improve the magnetic efficiency of the disc the non-sensor side can have the magnetic path at transducer
20 region closed by at least an annulus 38 of high permeability material acting between regions 12 and 14. The part 130 may itself provide this function.

Additional radially spaced regions of opposite polarity may be provided on the disc. These additional
25 regions can form keeper or guard regions. Further discussion of keeper or guard regions will be found in concurrently filed application PCT/GB00/03119 published under the number WO01/13081.

Fig. 5 illustrates how the disc-like torque transducer assembly can be adapted to work with circumferential magnetisation. Fig. 5 is a face view of a disc 50 through which torque is transmitted between a drive applied on the axis A and the periphery or vice versa as previously described. In this embodiment, there is a transducer region 52 which comprises an inner annular region 54 and an outer annular region 56. The circumferential magnetisation may be applied through the face 58 using a U-shaped magnet arrangement in which the North and South poles are aligned normally to a radius as indicated at 40, 42 for annulus 54 rather than being aligned radially as in Fig. 2. Annulus 56 is similarly created, it being understood that the disc is rotated relative to the magnet to magnetise the annulus.

In the absence of torque the circumferential fields in regions 54 and 56 will be trapped within the annular regions. It is assumed here that the magnetisable material exhibits magnetoelasticity. However, under torque the field becomes skewed in the manner well-known with prior art circumferential transducers, e.g. Garshelis U.S. patents 5,351,555, 5,520,059 and 5,465,627. The consequence is that at face 58 the regions 54 and 56 develop magnetic poles of opposite polarity. The polarity is dependent on the direction of torque.

A radial field M_s is generated externally of the surface 58 between regions 54 and 56, the radial magnetic

flux direction and magnitude being a function of the torque direction and magnitude. The radial flux can be sensed by sensors disposed as for the radial (reference) flux in Fig. 2. In contrast to Fig. 2 it is seen that
5 the detectable torque-dependent flux is radial, rather than circumferential, but there is no reference field component available.

A modification of the magnetising arrangement of Fig. 2 is that shown in Fig. 6 where the disc 10 is subject to
10 a single magnet source at one side, e.g. the magnet 16 adjacent face 11 to produce a magnetised zone 23 closed within the material of the disc as indicated by the dotted lines with two radially spaced annular poles 12' and 14' of opposite polarity between which, as in Fig. 3, an
15 external reference radial field M_r exists and a torque-dependent circumferential or tangential field M_s is produced under torque.

Other modifications are possible. For example, the magnets providing the magnetising source in Fig. 1 could
20 be replaced as indicated in Fig. 7 by a respective single magnet 16', 18' on each side of the disc 10, obliquely disposed with their poles in opposed polarity, so as to create a single annular zone, such as zone 12' at an angle to the direction of torque transmission through the disc.
25 An alternative is to rely on a radial offsetting of the magnets to produce an oblique magnetisation in the disc. Such a zone may also be created by a single magnet pole angled with respect to the plane of the disc on one side

only if the disc is thin enough and the magnet strong enough. A single magnet could also be placed parallel to the disc surface to have a flux path closed through the disc which would magnetise the disc to have two radially spaced poles, each being an annular zone.

Fig. 8 illustrates a profiled gear wheel having a central hub portion 10a connected to an outer toothed portion 10b by an intermediate portion 10c providing a step between the portions 10a and 10b which lie in different planes. Similarly to Fig. 7 a pair of magnets 16" and 18" are in this case offset to provide a magnetisation zone 12" at an angle to the direction of torque transmission. It will be noted that the magnets lie within the planes defined by the portions 10a and 10b.

As regards Fig. 8, this illustrates that the invention is applicable to a generally radially extending structure through which radial torque transmission occurs even though the torque may be sensed at a portion of the structure which is not itself radially oriented.

It has been found in practice that even with the single fields of Figs. 7 and 8 the transmitted torque cause a distortion of the emanated field detectable by an exterior sensor.

Other modifications may be made to the torque sensor arrangements so far described. The disc-like structures discussed above have been complete annuli about the axis, at least where the magnetic transducer element is to be formed. It is possible, however, that the disc-like

What may be conveniently called the disc form of implementing the invention provides the basis of implementing in an essentially planar form various

configurations which are analogous to configurations implementable on a rotating shaft. The disc form may also be adapted for stress measurements other than torque. Various implementations of these ideas will now be described.

With the disc arrangement generally as shown in Figs. 1 to 8, it is also possible to measure applied forces other than torque. A suitable arrangement is shown in Figs. 9 to 11. In this arrangement, a tube 170 is mounted on the disc around the outer magnetised region as shown in Figs. 9a and 9b. Forces applied to the axle will be transmitted through the disc to the tube 170 and vice versa. As shown in Fig. 10, when an axial force is applied to the axle or the tube 170, or a bending or shearing force is applied as shown in Fig. 11, mechanical stresses will be induced in the disc, resulting in a change to the magnetic flux, for example as shown in Fig. 11a. By detection of the changes in the magnetic flux by magnetic sensors as described previously, the nature and magnitude of these forces can be determined. The precise placement of these sensors adjacent the magnetised region(s) will depend on the nature of the mechanical stress induced in the disc-like structure as well as the mode of magnetisation employed.

In order to achieve optimum transducer performance in terms of consistent and repeatable measurements, it is first desirable to subject the disc or disc-like or plate-like structure (all referred to simply as a disc

hereinafter), or at least that part of it relevant to the region or regions to be magnetised, to a pre-magnetisation process by which the disc is magnetically cleansed. One form of apparatus suitable for magnetic cleansing is shown in Fig. 12. The pre-magnetisation process to be described is applicable to a disc in which the required magnetised regions are to be formed. The process to be described will demagnetise or de-gauss a disc in which unknown magnetic field patterns may have been established.

The disc as received may have been subject to various mechanical and/or heat treatment operations which differentially affect the magnetic domains within the material. It may have been subject to and have acquired undefined magnetic fields. Such unknowns will be deleterious to transducer performance. Thus in most cases the disc is to be put through a pre-magnetisation procedure to put it into a magnetically-defined state which has been referred to above as magnetically cleansed.

The degree of demagnetisation required is partially dependent on the magnetisation to be applied thereafter. For example if the magnetic programming to create the transducer element uses a relatively low level of magnetic field strength, the more important it becomes to completely demagnetise the sensor host (the disc). In this context magnetic cleansing means that the de-gaussing or demagnetisation procedure results in that the magnetic direction of the individual grains of the shaft material is random so that no grouping of magnetic domains in any

particular direction exists. The existence of magnetic domain grouping to provide some organised magnetic orientation of individual grains leads to deficiencies in the magnetised transducer element. For example, increased offsets of the measured magnetic signal; non-uniformity of the signal as a function of the rotational angle of the shaft; and lower stability over time of the transducer element.

The magnetic cleansing should extend well beyond the region at which the magnetised transducer element is to be formed, e.g. preferably the whole disc should be demagnetised so that there are no undefined local magnet systems in the sensor host. It is possible that such local systems may travel over time in the disc to affect the transducer specification on an ongoing basis. The provision of guard fields as mentioned above, provides a measure to mitigate this possibility if such fields remain even despite magnetic cleansing.

Fig. 12 illustrates an apparatus for magnetic cleansing. It comprises a demagnetising coil 80 wound in hollow solenoid fashion, a mains powered transformer arrangement 82 and a current limiter 84. For an 18 mm. diameter disc a suitable coil was about 300 turns of about 30 cm. diameter of a heavy current carrying capacity cable. The outer conductor of a heavy coaxial cable coiled into a solenoid coil proved to be suitable. The transformer arrangement 82 comprises a variable transformer 86 connected to a 110 or 240 VAC mains AC

supply. This is in turn connected to an isolation transformer 88 capable of safely delivering 10 amperes or more at its secondary at voltages at up to say 48V. The coil 80 is connected to the secondary of transformer 88 through the current limiter 84 which may be a resistor, e.g. a power rheostat, or more elaborate electronic device. The current limiter may be omitted provided steps are taken to monitor the current through the coil. A typical coil resistance would be about 100 milliohms. The variability of the transformer arrangement enables the current to be controlled as desired.

The coil 80 is energised and the disc is passed through the coil while the coil is energised at 8-10A. This produces a de-gaussing field of about 1 kGauss. Typically one is looking to achieve fields in the 500-1200 Gauss range. The disc may be mounted on a movable jig to move it along the axis of the coil and the movement continues as the far end of the disc leaves the coil so that the field to which the shaft is subjected gradually decreases. There may be other ways of achieving the de-gaussing procedure including control of the coil current as a function of the axial position of the disc with respect to the coil.

It will be understood that the coil 80 is sized to accommodate the disc. If this is not practicable, the coil may be moved close to and then away from the disc. A solenoid coil extending helically about an axis may not be the most convenient form to use in this case.

This pre-magnetisation is considered to have more general applicability to a wide range of sensor host shapes (shafts, discs etc.) and to a wide range of magnetic transducer types.

5 The pre-magnetisation procedure is followed by magnetisation of the disc as described above. Following the magnetisation procedure to be described a post-magnetisation step may be performed in the same manner as the pre-magnetisation procedure but at a lower level of
10 magnetic field.

 In the post-magnetisation procedure, the now magnetised disc is again passed axially through the energised solenoid coil 80. However, the AC current through the coil is of an order of a magnitude lower than
15 for the pre-magnetisation procedure. In the pre-magnetisation example given above, the 8-10A current employed for pre-magnetisation is reduced to say 0.5-1A for post magnetisation. The current is at a value which does not change the basic magnetic pattern sought to be
20 established but, as best can be surmised, it reduces or knocks-back parasitic fields that may be present after the magnetisation procedure. It has been found that the post-magnetisation step improves the uniformity of the output signal with rotation of the disc, offsets over time and
25 the final sensor stability generally.

 As already indicated above, where the disc is continually refreshed by a magnet system as it rotates, the pre-magnetisation procedure above disclosed may not be

necessary.

Claims

1. A transducer element for a torque or force transducer comprising a member having a structure which extends generally radially of an axis to transmit a stress between a radially inner region of the structure and a radially outer region, and at least one region of permanent magnetisation disposed between said inner and outer regions to be responsive to the transmitted stress and emanate a stress-dependent magnetic field.
2. A transducer element as claimed in Claim 1 in which there are two magnetised regions, a radially inner region and a radially outer region between which a stress-dependent field is established.
3. A transducer element as claimed in Claim 1 or 2 in which the or each region of permanent magnetisation is arcuate with respect to said axis.
4. A transducer element as claimed in Claim 1 or 2 in which the or each region of permanent magnetisation is an interrupted annulus.
5. A transducer element as claimed in Claim 1 or 2 in which the or each region of permanent magnetisation is annular.
6. A transducer element as claimed in any preceding claim in which said structure has a generally radially extending surface to which the or each magnetised region extends.
7. A transducer element as claimed in any preceding claim in which said member has a generally disc-like

structure.

8. A transducer element as claimed in any preceding claim in which there are two regions of permanent magnetisation; each being magnetised in an axial
5 direction and the polarities of magnetisation of the two regions being opposite.

9. A transducer element as claimed in Claims 8 and 6 and 7 in which said structure has two radially-extending surfaces to which the or each region of permanent
10 magnetisation extends and further comprising means located at one of said two surfaces to close a flux path between the two regions.

10. A transducer element as claimed in any one of Claims 1 to 7 in which there are two regions of permanent
15 magnetisation providing radially-spaced magnetic poles of opposite polarity at a surface of the member.

11. A transducer element as claimed in Claim 9 in which a flux path linking said regions is closed within the material of said member.

20 12. A transducer element as claimed in any one of Claims 1 to 7 in which there are two regions of permanent magnetisation, each being circumferentially magnetised and the polarities of circumferential magnetisation of the two regions being opposite.

25 13. A transducer element as claimed in any one of claims 1 to 7 in which there is a single region of permanent magnetisation which extends obliquely to said axis.

14. A transducer element as claimed in Claim 13 in which

said structure is generally disc-like and includes a step portion in which said single region is provided.

15. A stress sensing transducer system comprising a transducer element which is as claimed in any one of
5 Claims 1 to 14 and which is subject to stress generated between said radially inner and outer regions of said structure through said at least one magnetised region to emanate a torque-dependent magnetic field, and a sensor system comprising one or more magnetic field sensors
10 responsive to said stress-dependent magnetic field to provide a signal representing the stress generated between one and the other of said radially inner and outer regions.

16. A torque sensing transducer system comprising a
15 transducer element which is as claimed in any one of Claims 1 to 14 and which has a torque transmission path extending from one to the other of said radially inner and outer regions of said structure through said at least one magnetised region to emanate a torque-dependent
20 magnetic field, and a sensor system comprising one or more magnetic field sensors responsive to said stress-dependent magnetic field to provide a signal representing the stress transmitted between one and the other of said radially inner and outer regions.

25 17. A transducer as claimed in Claim 16 in which said member is adapted as a torque transmitting part capable of transmitting a rotational drive applied to said inner region of said structure to a load applied to said outer

region thereof or vice versa.

18. A transducer as claimed in Claim 15, 16 or 17 in which said member is disc-shaped.

19. A transducer system as claimed in any one of Claims
5 15 to 18 in which said one or more magnetic field sensors is disposed and oriented to detect a circumferential magnetic field component and provide a signal representing same.

20. A transducer system as claimed in Claim 19 further
10 comprising a magnetic field sensor device disposed and oriented to detect a radial magnetic field component and provide a signal representing same.

21. A transducer system as claimed in Claim 20 further comprising signal processing circuitry responsive to said
15 signals representing the circumferential magnetic component and the radial magnetic field respectively to derive an output signal representing the circumferential magnetic component referred to the radial magnetic field.

22. A torque or force transducer element
20 comprising a member adapted to transmit torque or force applied along, on or about an axis extending through the member to a portion of the member spaced from said axis, or vice versa.

said member having a surface transverse to said
25 axis,

a first, outer, region located between said axis and said portion and extending to said surface;

a second, inner, region located between said axis

AMENDED SHEET

and said outer region and extending to said surface,

said first and second annular regions, being magnetised with opposite polarity, and cooperating at said surface to generate a magnetic field component which
5 is a function of said torque or force.

23. A transducer element as claimed in Claim 22 in which said first and second regions are annular and encircle said axis, or at least one of the annular regions is an interrupted annulus, or said first and second regions are
10 arcuate with respect to said axis.

24. A transducer element as claimed in Claim 22 or 23 in which said first and second regions are both longitudinally magnetised to develop a radial magnetic field component extending therebetween at said surface
15 and a circumferential magnetic field component at said surface that is a function of torque.

25. A transducer element as claimed in Claim 22 or 23 in which said first and second regions are both circumferentially magnetised to develop a radial magnetic
20 field component at said surface as a function of torque.

26. A torque or force transducer assembly comprising first and second members coaxially disposed, said first member being of greater diameter than said second member,

25 a disc-like member extending generally radially of said axis and connecting said first member to said second member for transmitting force from one member to the other, said disc-like member comprising two magnetised

annular regions that are at least arcuate or annular or are part annular,

said magnetised regions having a magnetisation such that the regions cooperate to generate a magnetic field component that is a function of a stress established in
5 transmitting a load between said first and second members.

27. A transducer assembly as claimed in Claim 26 in which said assembly is adapted to transmit torque from
10 one of said members to the other.

28. A transducer assembly as claimed in Claim 26 or 27 in which said magnetised regions are longitudinally magnetised with opposite polarities or circumferentially magnetised with opposite polarities.

15 29. A transducer assembly as claimed in Claim 26 in which said first and second members are mounted to cause flexing of said disc-like member in response to relative axial displacement of the first and second members.

20 30. A transducer assembly as claimed in Claim 26 in which said first and second members are disposed to cause flexing of said disc-like member in response to a relative displacement of said first and second members away from axial alignment.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number
WO 01/13082 A1





- (51) International Patent Classification⁷: **G01L 3/10**, 1/12, 3/14
- (21) International Application Number: **PCT/GB00/03125**
- (22) International Filing Date: **14 August 2000 (14.08.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
9919065.4 12 August 1999 (12.08.1999) **GB**
- (71) Applicant (for all designated States except US): **FAST TECHNOLOGY GMBH [DE/DE]**; Otto-Hahn-Street 24, Gewerbegebiet Riemerling, D-85521 Ottobrunn (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MAY, Lutz, Axel** [DE/GB]; 3 The Grange, Newbury, Berkshire RG14 6RJ (GB).
- (49) Agent: **BLUFF, John, William**; Lloyd Wise Tregear & Co., Commonwealth House, 1-19 New Oxford Street, London WC1A 1LW (GB).
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **MAGNETISED TRANSDUCER ELEMENT FOR TORQUE OR FORCE SENSOR**

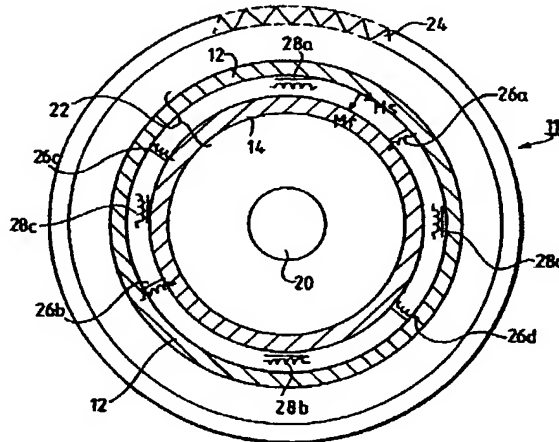

(57) Abstract: A magnetic torque transducer for a structure such as a disc (10) through which torque is transmitted between a central shaft (20) to which the disc is mounted and an outer periphery such as a gear wheel (24). The intervening region through which torque is transmitted is magnetised to provide a transducer element (22) having two magnetised, annular regions (12, 14; 54, 56) which cooperate to emanate a magnetic field (M_s) that is torque-dependent. The two magnetised regions may be longitudinally-magnetised (12, 14) through the disc or circumferentially magnetised (54, 56) with opposite polarities. A sensor assembly of non-contacting sensors (26a-26c) is used to detect the emanated field and connected in circuitry to provide a torque-dependent signal. In an alternative a single magnetised annular region is employed. The annular region or regions need not be a complete annulus. The same disc-like structure can also be used as force sensor for measuring bending moments or other forces which result in stress occurring in the disc.

WO 01/13082 A1

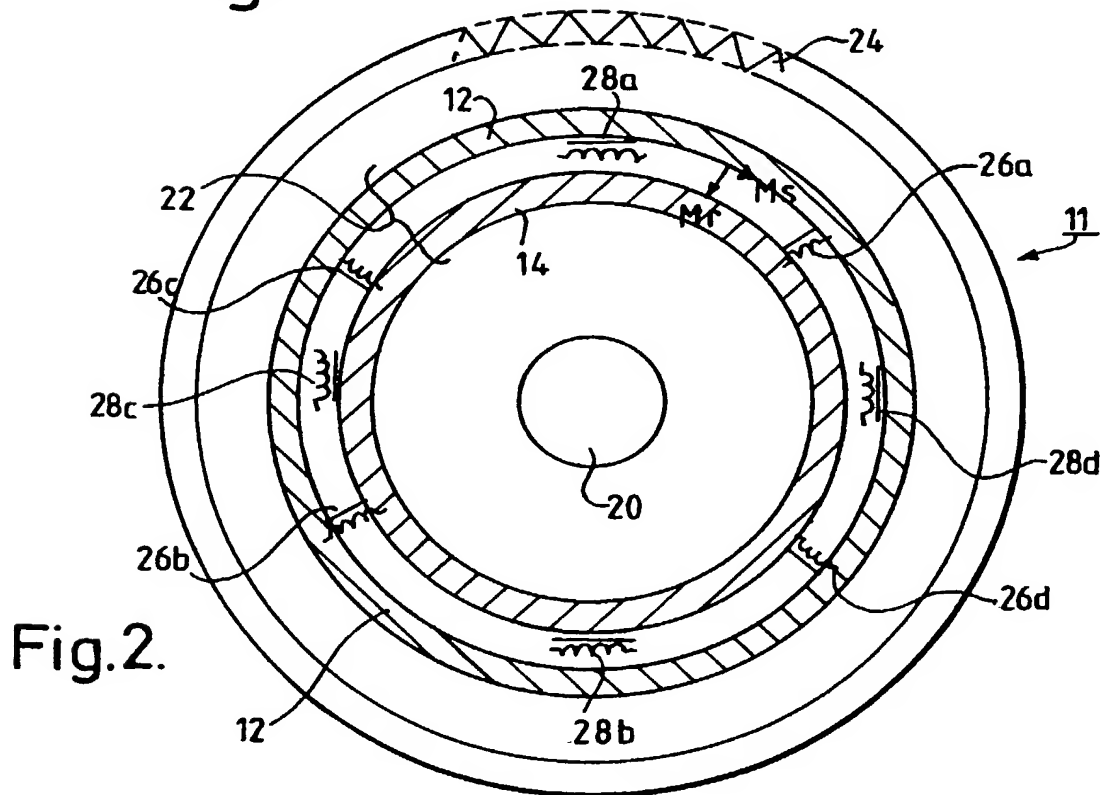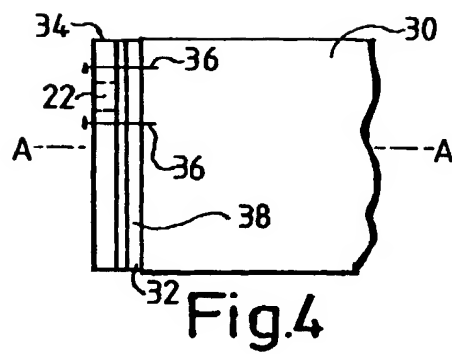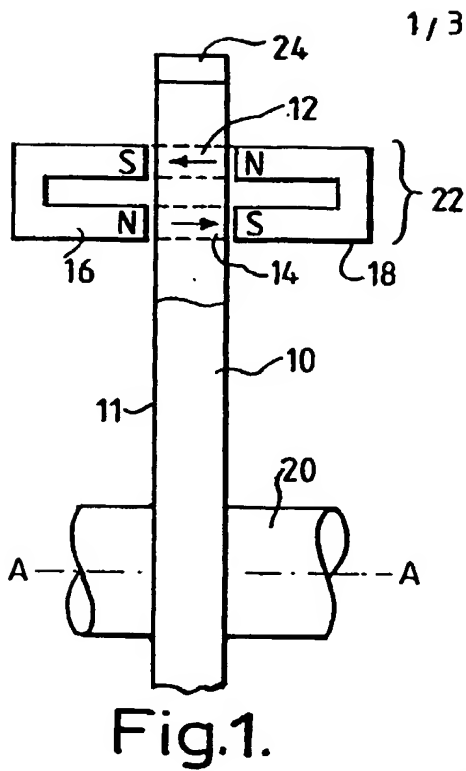

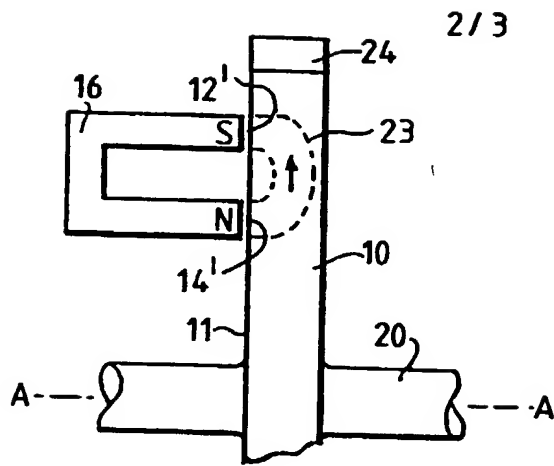


Fig.6.

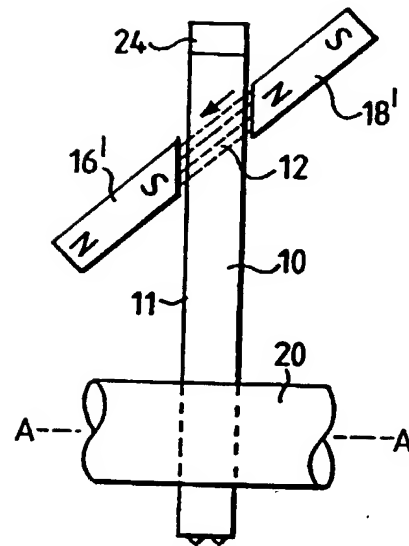


Fig.7.

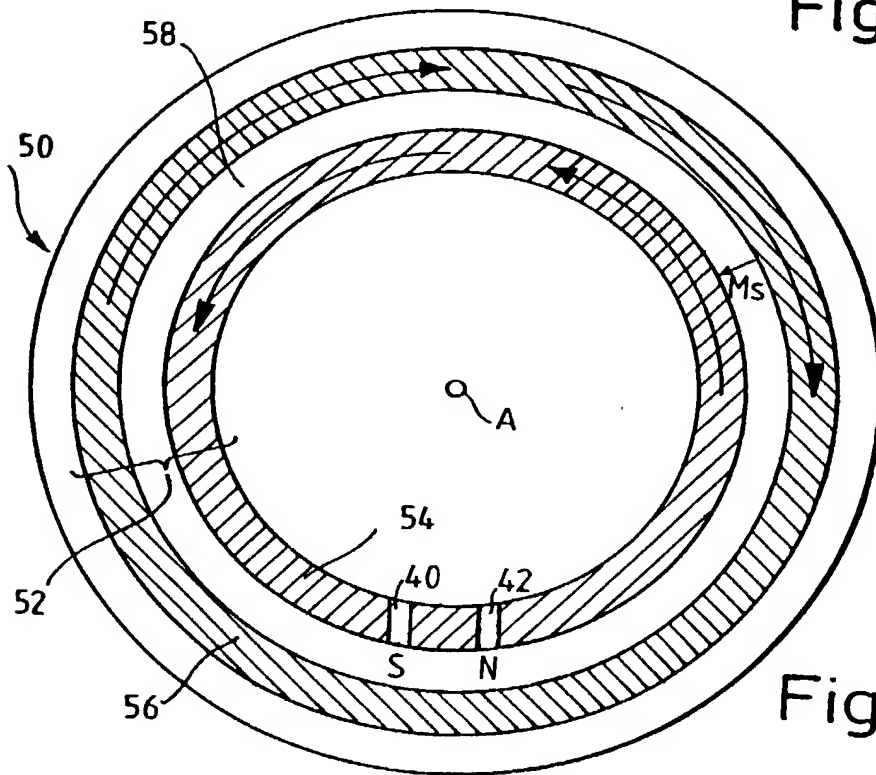


Fig.5.

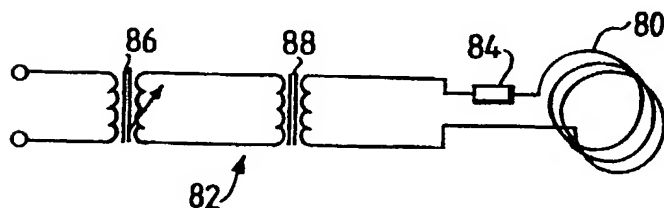


Fig.12.

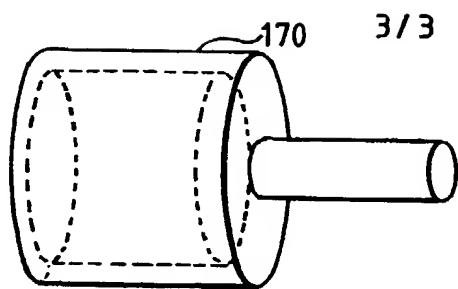


Fig. 9a.

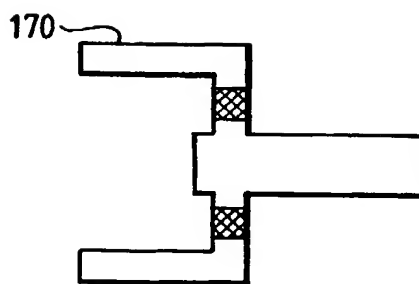


Fig. 9b.

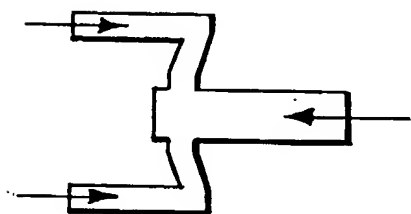


Fig. 10.




Fig. 11.

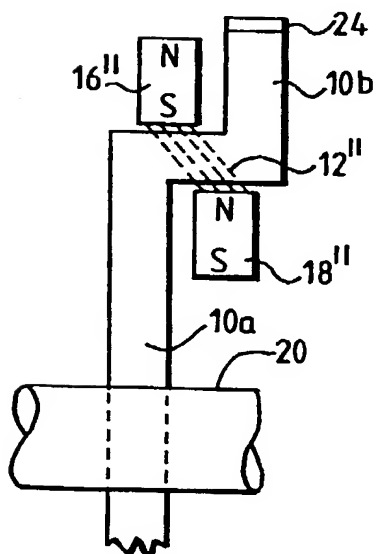


Fig. 8.




Fig. 11a.

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled MAGNETIZED TRANSDUCER ELEMENT FOR TORQUE OR FORCE SENSOR the specification of which

(check one) ☒ is attached hereto.

☒ was filed on FEB. 11, 2002
as Application Serial No. 10/049,322
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a-d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<u>9919065.4</u> (Number)	<u>GB</u> (Country)	<u>12/08/99</u> (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
<u>PCT/GB00/03125</u> (Number)	<u>PCT</u> (Country)	<u>14/08/00</u> (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

(Provisional Application No.)

(Filing Date)

(Provisional Application No.)

(Filing Date)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. Robert C. Kain, Jr., Reg. No. 30,648; Martin Fleit, Reg. No. 16,900; Jon A. Gibbons, Reg. No. 37,333; Jose Gutman, Reg. No. 35,171; and Steve Bongini, Reg. No. 40,917

Send Correspondence to: Robert C. Kain, Jr., **Customer Number 004897**
Fleit, Kain, Gibbons, Gutman & Bongini, P.L.
750 Southeast Third Avenue, Suite 100
Ft. Lauderdale, Florida 33316-1153
Direct Telephone Calls to: Robert C. Kain, Jr., (954) 768-9002

Lutz Axel May

Full name of sole or first inventor

Inventor's signature

Date

Gelting, Germany

Residence

DE

Citizenship

Wolfratshauser Strasse 23a

Post Office Address

Gelting, D-82538, Germany

Full name of second joint inventor, if any

Inventor's signature

Date

Residence

Citizenship

Post Office Address

(Supply similar information and signature for third and subsequent joint inventors.)